Product Datasheet

Multi-function corner

CODEX BST 35

Self-adhesive sealing corners for the waterproof connection of shower bases installed flush with the floor

APPLICATIONS

For the professional sealing of shower bases installed flush with the floor when waterproofing composite seals under ceramic tiles and slabs as well as natural stone coverings in combination with codex composite seals. For tub connections for shower bases installed flush with the floor. For tub connections in shower bases installed flush with the floor and for flat shelves in bathtubs and shower bases. Excellent adhesion on all common tub finishes.

For waterproofing according to:
DIN 18 534: For the sealing of interior rooms with water impact classes W0-I, W2-I.
ZDB Bulletin “Composite seals” of load class A0 and A.

SUITABLE FOR USE ON

Composite sealing systems with:

- codex AX 10, Liquid Sealing
- codex NC 210, 1-component Flex Sealing Compound
- codex AX 220, 2-component Flex Sealing Compound
- codex Hydrostop, Sealing Sheet
- codex Epo 2000, Reactive Sealing

SUITABLE ON

- Acrylic
- Enamel
- Metal
- Glass
- Plastic surfaces
- Painted finishes

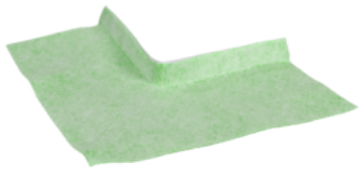

PRODUCT BENEFITS/FEATURES

- Pre-embossed for rounded corners
- Simple installation
- Watertight and flexible
- Universal, for all shower bases

TECHNICAL SPECIFICATIONS

Pack type	carton
Pack size	10 corners
Shelf life	24 months
Color	green
Length	25 cm
Width	25 cm
Thickness	approx. 0.7 mm

GEV-EMICODE EC 1 PLUS very low emission

codex | A brand of Uzin Utz Group
GB | Uzin Utz UK Ltd. | Unit 2, Mitchell Court | Central Park, Rugby | Warwickshire, CV23 0UY | Phone +44 1788 530 080 | Fax +44 1788 536 508 codex.uk@uzin-utz.com | www.codex-x.com
DE | codex GmbH & Co. KG | Heuweg 5/1 | 89079 Ulm | Tel +49 731 927093-0 | Fax +49 731 927093-190 | info@codex-x.de | www.codex-x.com

SUBSTRATE PREPARATION

Substrates must be pretreated according to the specifications of the codex sealing system used for sealing-up.

Bonding areas on bathtubs and shower bases must be cleaned to be free from grease.

Refer to the product data sheets for other codex products used.

APPLICATION

1. Glue the sealing corner with the self-adhesive butyl strip to the previously cleaned rim of the tub without creases.
2. After the tub has been installed, insert the sealing corner into the fresh sealing layer and press down without creases.
3. During the subsequent application of the codex composite seal, the sealing corners must be completely worked over and embedded in the seal.

IMPORTANT NOTES

- Store dry at room temperature, protect from direct exposure to light.
- The current product information of the respective codex composite seal must be observed when using the codex composite seal products mentioned.
- The following apply as well, amongst others, or are recommended for special consideration:
  - DIN 18 352 “Tile and slab work”
  - DIN 18 157 “Ceramic work in thin bed processes”
  - DIN 18 534 “Waterproofing for indoor applications”
  - ZDB bulletins:
    - “Composite seals”
    - “Floor coverings from tiles and slabs outside of buildings”
    - “Movement joints in covering and flooring from tiles and slabs”
    - “Interface coordination”
  - BEB bulletin:
    - "Assessment and preparation of substrates".

SEALS OF QUALITY & ECOLABELS

- EMICODE EC 1 PLUS / Very low emission

PROTECTION OF THE WORKPLACE AND ENVIRONMENT

The product itself does not require any special labour protection measures. Refer to the notes on protection of the workplace and the environment in the Product Information Sheets for the other installation materials used.

DISPOSAL

Sleeves and carton packaging free from residues can be recycled. Material residues can be disposed of with domestic waste.

The above information is based on our experience and careful investigations. The variety of associated materials and different construction and working conditions cannot be individually checked or influenced by us. The quality of your work depends, therefore, on your own professional judgement and product usage. If in doubt, conduct a small test or obtain technical advice. Observe the installation recommendations of the covering manufacturer. The publication of this datasheet invalidates all previous Information. The respective updated version of this datasheet can be found on our website: www.codex-x.com | 01/2022