Product Datasheet

Cut protection tape

CODEX SB 60

Stainless steel fabric tape to protect the composite seals

APPLICATIONS

Flexible, stainless steel mesh strip for permanent and reliable protection of the sealing when removing and replacing silicone joints.

SUITABLE FOR USE ON

- Private and commercial use
- Swimming pools and large kitchens
- Tile and natural stone coverings
- All silicone joints which have to be protected against cutting for subsequent replacement

SUITABLE ON

- All types of codex compound sealings

PRODUCT BENEFITS/FEATURES

- Stainless steel
- Cut-resistant
- Flexible
- For interior and exterior use

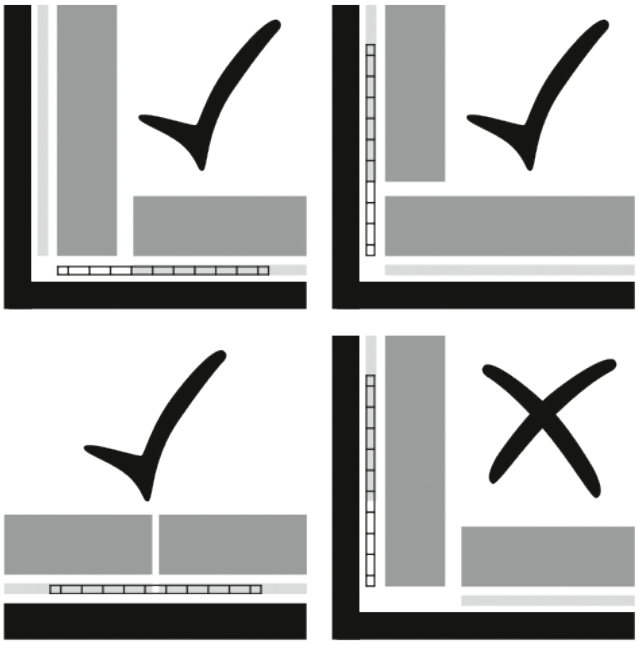

TECHNICAL SPECIFICATIONS

Pack type	carton
Pack size	10 m roll
Length	10 m
Width	4 cm
Roll weight	360 g
Mesh size	1 mm

codex | A brand of Uzin Utz Group
GB | Uzin Utz UK Ltd. | Unit 2, Mitchell Court | Central Park, Rugby | Warwickshire, CV23 0UY | Phone +44 1788 530 080 | Fax +44 1788 536 508 codex.uk@uzin-utz.com | www.codex-x.com
DE | codex GmbH & Co. KG | Heuweg 5/1 | 89079 Ulm | Tel +49 731 927093-0 | Fax +49 731 927093-190 | info@codex-x.de | www.codex-x.com

APPLICATION

1. Use metal cutters to cut the cut protection tape so it is approx. 3 - 4 cm longer than the required length. Fold the strip over at both ends to achieve the actual length required, so that any sharp ends cannot damage the sealing.
2. Place the cut protection tape in the fresh adhesive bed when laying the tiles and use a trowel to ensure it is firmly embedded. Ensure that the position of the tape is always underneath the movement joint.
3. Then apply the adhesive over the cut protection tape and lay the tiles accordingly.

SEALS OF QUALITY & ECOLABELS

- *no*

PROTECTION OF THE WORKPLACE AND ENVIRONMENT

The product itself does not require any special labour protection measures. Refer to the notes on protection of the workplace and the environment in the Product Information Sheets for the other installation materials used.

DISPOSAL

All product residues are treated as normal construction waste.

The above information is based on our experience and careful investigations. The variety of associated materials and different construction and working conditions cannot be individually checked or influenced by us. The quality of your work depends, therefore, on your own professional judgement and product usage. If in doubt, conduct a small test or obtain technical advice. Observe the installation recommendations of the covering manufacturer. The publication of this datasheet invalidates all previous Information. The respective updated version of this datasheet can be found on our website: www.codex-x.com | 01/2022