Product Datasheet

Fabric cut protection tape

CODEX SB 80

Cut-resistant fabric tape for the protection of bonded waterproofing

APPLICATIONS

Flexible, self-adhesive fabric tape for permanent and secure protection of the seal in the area of corner connections and expansion joints when removing and replacing silicone joints.

SUITABLE FOR USE ON

- Private and commercial areas
- Bathroom and shower
- Tile and natural stone coverings
- For all silicone joints that need to be cut-resistant for later replacement

SUITABLE ON

- All types of codex bonded waterproofing

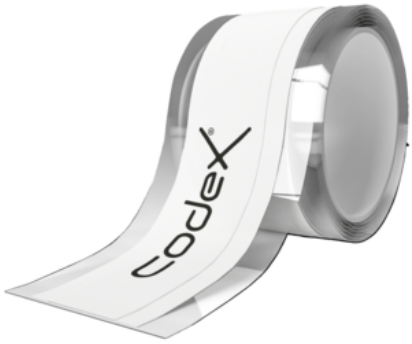

PRODUCT BENEFITS/FEATURES

- Firm fabric
- Self-adhesive
- Flexible
- Indoor and outdoor use

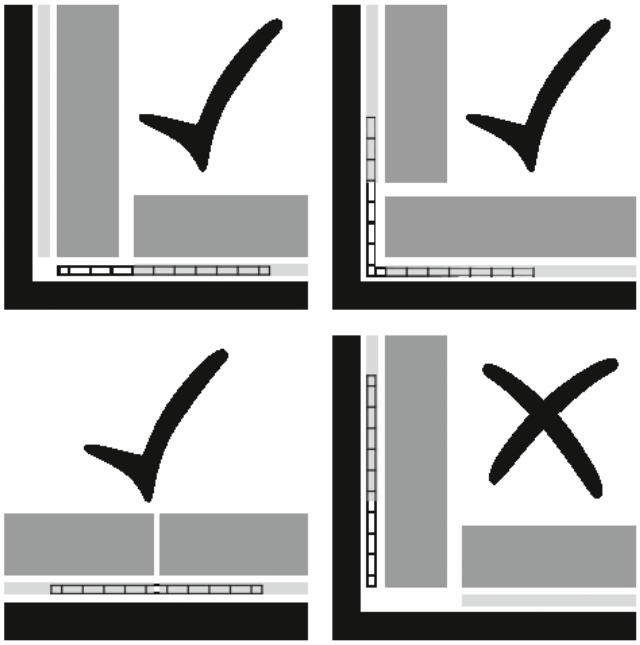

TECHNICAL SPECIFICATIONS

Pack type	carton
Pack size	10 m/roll
Color	white
Width	approx. 5 cm
Thickness	approx. 0.7 mm
Roll weight	approx. 300 g

codex | A brand of Uzin Utz
GB | Uzin Utz UK Ltd. | Unit 2, Mitchell Court | Central Park, Rugby | Warwickshire, CV23 0UY | +44 1788 530 080 | codex.uk@uzin-utz.com | www.codex-x.com
DE | codex GmbH & Co. KG | Heuweg 5/1 | 89079 Ulm | +49 731 927093-0 | info@codex-x.com | www.codex-x.com

SUBSTRATE PREPARATION

The adhesive surfaces intended for the cut protection tape must be made dust-free.

APPLICATION

1. Cut the cut protection tape to the required size with scissors.
2. Remove the backing strip and stick the cut protection tape in the intended places before laying the flooring. This can be done on one side or over the corner. The tape must be positioned so that it is always under the cut surface of the corner, connection or expansion joint.
3. The adhesive bed is then combed on over the edge protection tape and the tile or natural stone covering is laid accordingly.

PROTECTION OF THE WORKPLACE AND ENVIRONMENT

The product itself does not require any special labour protection measures. Refer to the notes on protection of the workplace and the environment in the Product Information Sheets for the other installation materials used.

DISPOSAL

All product residues are treated as normal construction waste.

The above information is based on our experience and careful investigations. The variety of associated materials and different construction and working conditions cannot be individually checked or influenced by us. The quality of your work depends, therefore, on your own professional judgement and product usage. If in doubt, conduct a small test or obtain technical advice. Observe the installation recommendations of the covering manufacturer. The publication of this datasheet invalidates all previous Information. The respective updated version of this datasheet can be found on our website: www.codex-x.com | 04/2024